

ASA1222G-D

Dahua




Dahua ASA1222G-D. Dahua terminal with biometric reader and ID card access control and presence based on TCP / IP. LCD interface 2,000 fingerprints, 1,000 cards, 1,000 users, 100,000 attendance records. Authentication by fingerprint + password, only fingerprint, only password. Voice messages. USB Asa1222g-d.

Features

- 32 bit processor
 - Mechanical buttons, LCD interface
 - Built-in high capacity rechargeable lithium battery, up to 2600 mAh
 - 1 ~ 3cm card reading distance
 - Response time: <0.1 s
 - Fingerprint verification response time ≤ 0.5 s
 - Footprint recognition time of ≤ 1.5 s
 - FAR $\leq 0.00004\%$, FRR $\leq 0.15\%$
 - Supports three assistance modes: fixed, manual / automatic and forced
 - Supports shift settings by department and person
 - Supports import and export of assistance data from a USB flash drive
 - Support search for attendance records
 - Supports software assistance and voice messages
-
- Support online update

Specs

- Biometric terminal for access control and presence
- 32 bit processor

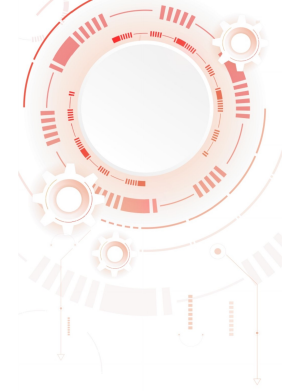

- Fingerprint recognition time of <1.5s
- Fingerprint reading response time of <0.5s
- FAR: $\leq 0.00004\%$
- FRR: $\leq 0.15\%$
- Footprint capacity: 2,000
- User capacity: 1,000
- Attendance registration capacity: 100,000
- Capacity for 1,000 ID cards
- 1 ~ 3 cm card reading range
- Card reading response time of <0.1s
- LCD interface
- Voice messages
- T9 input method
- Communication: TCP / IP, USB 2.0
- Up to 24 assistance periods
- Up to 20 departments
- Firmware update via USB
- Operating temperature: $0^{\circ}\text{C} \sim +55^{\circ}\text{C}$
- Working humidity: 10% ~ 90%
- Dimensions: 181.6 x 135.6 x 31 mm
- Weight: 370 g

- DAHUA-1974